



L16

| High&Low Beam Auxiliary Light

**Eight brightness/
color temperature
levels adjustment**

19,000 lumens of total luminous flux
with clear and distinct tangents.


Total **19000** lumens

Low beam mode: 5000-16800 lumens,
high and low beam mode: 5800-19000 lumens.




High&Low Beam Auxiliary Lights L16


Unit: Lumen



Motorcycle original LED



Automobile original LED



Aluminum alloy rotary switch

Eight brightness / color temperature levels adjustment

The switch is installed at the clutch handle, for easy use.

Main switch + Wheel switch

Status Indicator

Click the main switch to switch the light mode, rotate the wheel switch directly to adjust the brightness.

Overtaking light switch


Click this switch to operate the overtaking lights.

Level indicator

Indicates the current brightness level.



Eight levels of brightness adjustment / from dark to bright




5800 lumens
in high and low beam mode

19000 lumens
in high and low beam mode




Eight levels of color temperature / white light to yellow light



6000K

3000K

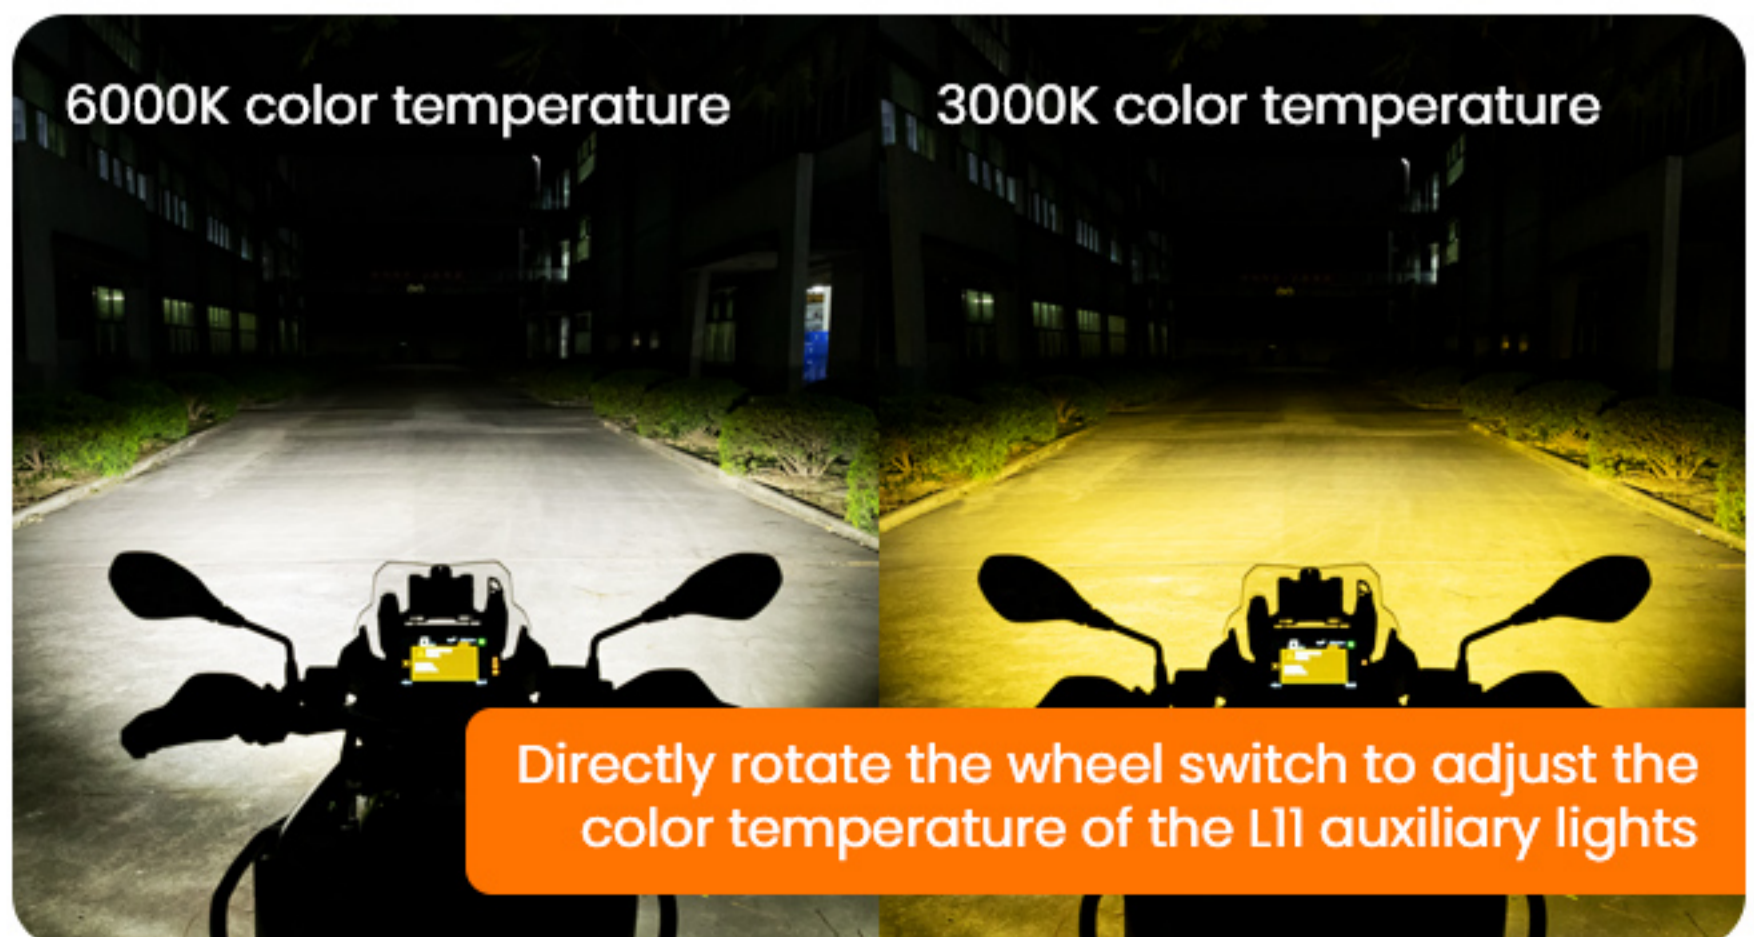

Optional LOBOO quick detach lights mount

Quick release design, no tools required to detach and attach the auxiliary light. Quick detach lights mount + quick release waterproof connector + Lock.

300
Motour Life



▲ LOBOO quick detach lights mount



Low beam tangent design has good paving effect

Five-pearl
high-efficiency
lens

Wide paving in the low beam, clear and obvious tangent line, high poly and high brightness in the high beam.



Tangent in low beam mode



High & low beam integrated Multiple lighting modes

Able to cycle through low beam, high and low beam and three warning light modes.



Warning light mode

Convenient for warning signal at night



Left and right
flashing separately



Left and right flashing
simultaneously



Left and right
flash in turn

Horn flash warning

Original horn control

The driver is equipped with a flashing warning light signal cable, which can be connected to the motorcycle horn switch to sound the siren and activate the flashing warning light mode at the same time.



LOBOO auxiliary light can be controlled by BMW motorcycle original switch

You can purchase an additional LOBOO auxiliary light CAN-BUS intelligent control module, suit for BMW motorcycle with wonder wheel.



Synchronization of high and low beams and overtaking lights



Use the wheel switch to adjust brightness



Three warning light modes



Independent control of main and second lights



Whistle and flashing light warning



Aluminum alloy body
CNC process



IP68 dustproof and waterproof



Lossless installation

CAN-BUS controller 4pin connection cable supported models

BMW R1200GS
BMW R1200GS Adventure
BMW R1200R
BMW R1200RT

BMW R1200RS
BMW R1250GS
BMW R1250GS Adventure
BMW R1250R

BMW R1250RT
BMW R1250RS
BMW F850GS

CAN-BUS controller 8pin connection cable supported models

BMW F750GS
BMW F900XR

BMW K1600 All Series

IP68 dustproof and waterproof Easy to cope with harsh environments

This product has passed lots of rigorous tests and can maintain normal performance even when riding in stormy weather.



LOBOD
For My Motour Life

Intelligent temperature control

Automatic brightness reduction for cooling

The light body and driver can automatically downshift and cool down when the temperature is high, which can effectively avoid the damage caused by high temperature overheating, safer to use, and effectively extend the lifespan of the auxiliary lights.



Reverse connection protection



High voltage protection

Aluminum Material Body Excellent heat dissipation

The main body of the auxiliary light is made of aluminum alloy, sturdy and durable, reducing weight while providing better heat dissipation.



Fully **CNC** process light body





Supports multi-angle mounting

The auxiliary lights can be rotated, and can be mounted in different angles according to different needs and mounting locations.



Various pipe diameters can be mounted

Suitable for 22mm/25mm/28mm
/32mm/38mm pipe, easy to install.



Product parameters



The above data is measured manually, the error is within reasonable limits, please prevail in kind.

Brand	LOBOO	
Product Name	High&Low Beam Auxiliary Light	
Model	L16	
Input voltage	12-15V	
Dustproof and waterproof	IP68	
Product Material	Aluminum Alloy	
Color temperature	3000K-6000K	
Total luminous flux	19000 lumens (MAX)	
Modes	Low beam mode	High & low beam mode
Power	50W-168W	58W-190W
Color	Black	

Installation display

